

Wireless, Non-Intrusive Ultrasonic Sensors for Corrosion/Erosion Monitoring


microPIMS® I.S. is a 3rd-generation, star-network topology system which leverages SNI's success and experience in non-invasive corrosion/erosion monitoring. It is an intrinsically safe, fully wireless, non-intrusive, network of ultrasonic sensors. Powered by long-life batteries, it operates using long-range sub-gigahertz LoRaWan® wireless connectivity.

Each microPIMS sensor can be programmed to take thickness readings at any user-defined time interval. Data is automatically sent to private webPIMS™, cloud-based or on-premise LoRaWAN system + software back-end for analysis, trending and more.

- Accurate corrosion/erosion measurements required for monitoring asset integrity and fitness for service.
- When short- or long-term corrosion rate data is needed for monitoring crude-slate changes or to correlate operational system upsets, change of corrosion inhibitors, or injections rates.
- Corrosion/erosion of asset locations with difficult-to-access TML positions.
- Hazardous locations where injuries or loss-of-life risk is high.
- Brief period TML monitoring is needed, and re-positioning is required. Simple attachment to piping, vessels, and tanks.



Gateway with antenna



WATCH VIDEO

Monitor "low spots"

- post-NDE screening of pits to monitor remaining thickness
- measures down to 0.040" (1 mm)

Reduce costs

- reduce scaffolding and insulation removal/refitting for internal corrosion monitoring
- more accurate/reliable data improving operations

Monitor corrosion rate

- accurate to 0.001" (0.025mm)
- historically problematic locations

Easy integration into existing LoRa Network

- Add microPIMS LoRa sensors onto an existing LoRa Wan network
- Connect microPIMS data to other software apps.

15-years at 1 reading/day (2x D-Size Batteries - 3.6VDC).

Two models: dual element (up to 275°F/135°C) and **ultra-high-temp** (up to 932°F/500°C).

Built-in thermocouple provides surface temperature readings for temperature-compensated thickness data.

Installed temporarily or permanently in under 15 minutes per sensor.

Wireless gateway supports up to 1,000+ microPIMS nodes and offers up to ~1 mile (1.6km) range in industrial settings.

Cellular or ethernet data back-haul through gateway.

ULCSA C1D1, ATEX / IECEx Zone 0 Hazardous-area certified.




DATA CONNECTION SYSTEM OPTIONS

**ULTRA-HIGH-TEMP
SINGLE-ELEMENT
DELAY-LINE
SENSOR**





**HIGH-TEMP
DUAL-ELEMENT
SENSOR**

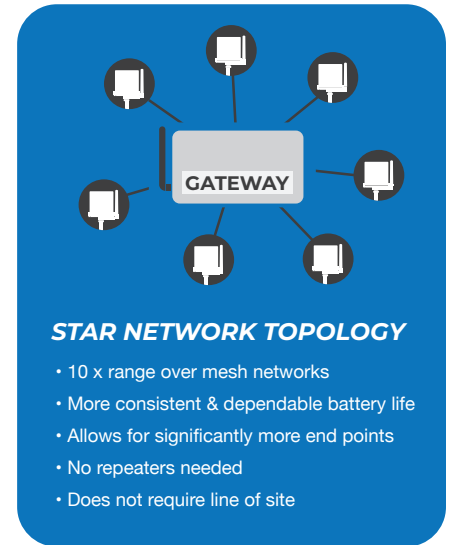

SENSOR NETWORKS GATEWAY

FACILITIES EXISTING GATEWAY



← Cellular or Ethernet →



LoRaWAN to Cloud

microPIMS thickness data from the sensors is transmitted wirelessly from the LoRaWAN gateway to the webPIMS software and stored via the cloud where thickness, temperature, A-Scans, and other data can be analyzed or exported instantly, on demand.

ON-PREMISES



If utilizing cloud data storage is not an option, the On-Prem webPIMS data management system provides users with a local self-contained (in-the-fence) system.

microPIMS thickness data from the sensor is transmitted through LoRaWAN gateways directly into the On-Prem system.


PRIVATE NETWORK INTEGRATION

For facilities with a current LoRaWAN private network. Sensor Networks' microPIMS can be installed and connected directly to an existing network.


- 1 **LoRaWAN High-Gain Antenna**
- 2 **Two D-Cell batteries**
provide 15 years of wireless operation.
Commercially available (non-proprietary)
- 3 **LoRa Radio**
- 4 **Ultrasonic Testing PCB**
- 5 **Stainless Steel Heat Stand-Off**
- 6 **Temperature Sensor**
- 7 **Single-Element Ultra-High-Temp Transducer**
capable of being installed on pipes up to 932°F (500°C)
- 8 **Spring-Loaded, Dual-Element Ultrasonic Transducer**
enhances accuracy and can measure pits down to 0.040" (1 mm) remaining wall thickness on pipes / tubes as small as 1 in. Ø (24.5mm)

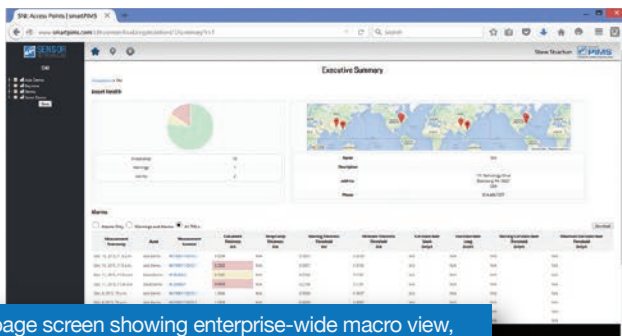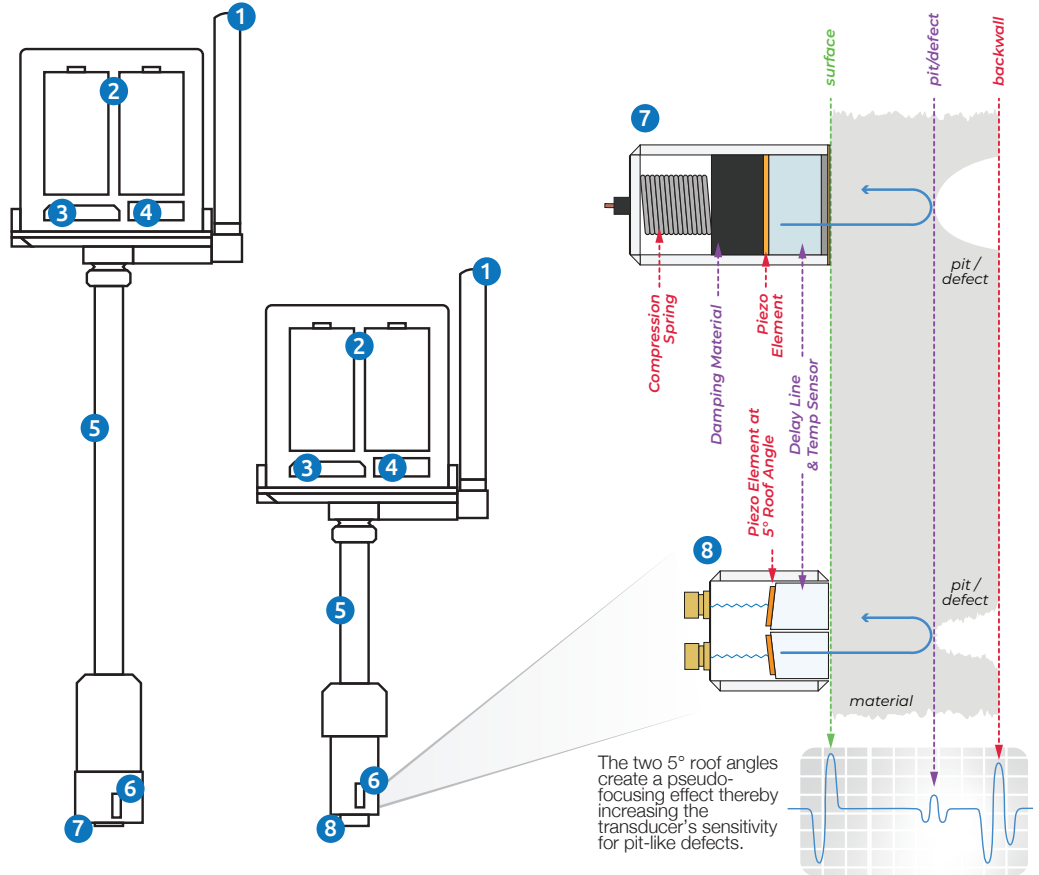

Home page screen showing enterprise-wide macro view, including pie chart with sensor location, status, GPS, and latest readings of all sensors.

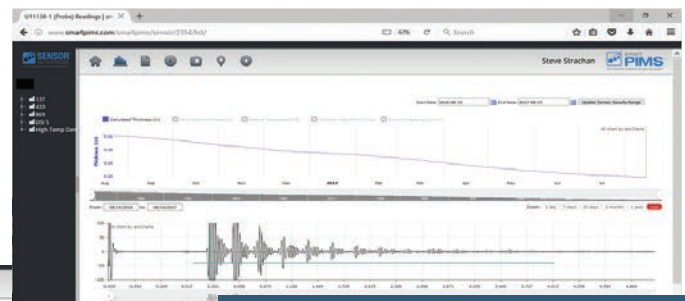

Trending screen graphically shows metal loss versus time, temperature, thickness, and digitized RF signals (A-Scans) for each measurement.

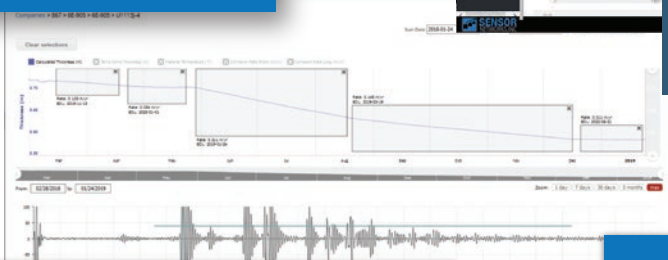

Features like temperature compensation help maximize accuracy of thickness measurements.

Time windows allow for corrosion-rate calculations due to episodic events.



High-Temp Dual attached with a magnetic clamp



Ultra-High-Temp attached with a band clamp



SN Integrity

microPIMS specifications

	dual element	ultra-high-temp
elements	dual	single (delay line)
frequency	5 MHz	7 MHz
element diameter	0.375 in. (10mm)	0.375 in. (10mm)
measurement range	0.040-4" (1-100mm)	0.125-1" (3-25mm)
sensor surface temperature	-40°F (-40°C) up to 275°F (135°C)	-40°F (-40°C) up to 932°F (500°C)
weight	20.5 oz. (580g)	31.0 oz. (880g)
size (height × housing dia.)	9½×2.8" (241×70mm)	15½×2.8" (394×70mm)



hazardous location rating See chart on the right
intrinsic safety

Ingress Protection Rating IP-67

resolution 0.001" (0.025mm)

battery life (typical)[†] 15 yr. @ 1 reading/day 68°F (20°C)

construction 303 stainless steel

mounting magnetic base; band clamp

data digital thickness, RF waveform, temperature, time/date stamp

data access cloud-based via webPIMS™ portal or on-premise

local network LoRaWAN (node to gateway)

connectivity gateway to cloud (cellular or ethernet) OR on-premise

sensor count 1,000+ microPIMS units per gateway

gateway* outdoor; cast alum.; Approx. 12×6×4" (305×152×102mm); 6.0lb (2.7kg)

[†] Typical Values. Results may vary site to site.
^{*} Without antennas.

UK CA 2503 CE 2776 Ex II 1 G Ex ia IIC T4 Ga, Ta = -40°C to +70°C
CML 21ATEX2356X | CML 21UKEX2357X | IECEx CML 21.0044X



Ex ia IIC T4 Ga | Class I, Div 1, Gp A-D T4 Ex ia
Class I Zone 0, AEx ia IIC T4 Ga | Class I, Div 1 Gp A-D T4
Ta = -40°C to +70°C
E114158 - Hazardous Location

WARNING: USE ONLY TADIRAN TL-5930, SL-2780 OR XENO XL-205F BATTERIES
WARNING: SPECIAL CONDITIONS FOR SAFE USE, SEE INSTRUCTIONS

IP 67
BATTERY POWERED: 2 Cells, 7.2V, 0.94W
PROGRAMMING PORT: Um = 5V



Contains:
IC: 23069-CW24012
FCC: 2ANDP-CW24-012
Made in the USA

on-premises specifications



rack mount configuration



desktop configuration

configuration	single-socket 1U rack size / 19 in.	desktop
weight	36.9 lbs (12.2 kg)	25.70 lbs (11.70 kg)
dimensions	17.1 in. (434 mm), 23.5 in. (596 mm)	6.88 in. (175 mm), 14.17 in. (360 mm), 17.87 in. (454 mm)
main power	110-230VAC / 50-60Hz	110-230VAC / 50-60Hz
haz area cert	none	none
operating system	Linux	Linux
LoRaWAN configuration	ResloT - perpetual license	ResloT - perpetual license
analysis application	webPIMS - perpetual license	webPIMS - perpetual license

Ver. 1.4
©2022 Sensor Networks, Inc. All rights reserved. microPIMS® is a registered trademark.
matPIMS™ and webPIMS™ are trademarks of SNI.
microPIMS is covered by five U.S. patents.
PIMS: Permanently Installed Monitoring System.
LoRaWAN® is a registered trademark of the LoRa Alliance.

35 Wisteria Grove, Felixstow SA 5070, Australia
snintegrity.com.au · 08 7220 6670
info@snintegrity.com.au



Follow us on
LinkedIn